


BICYCLE CATALOG

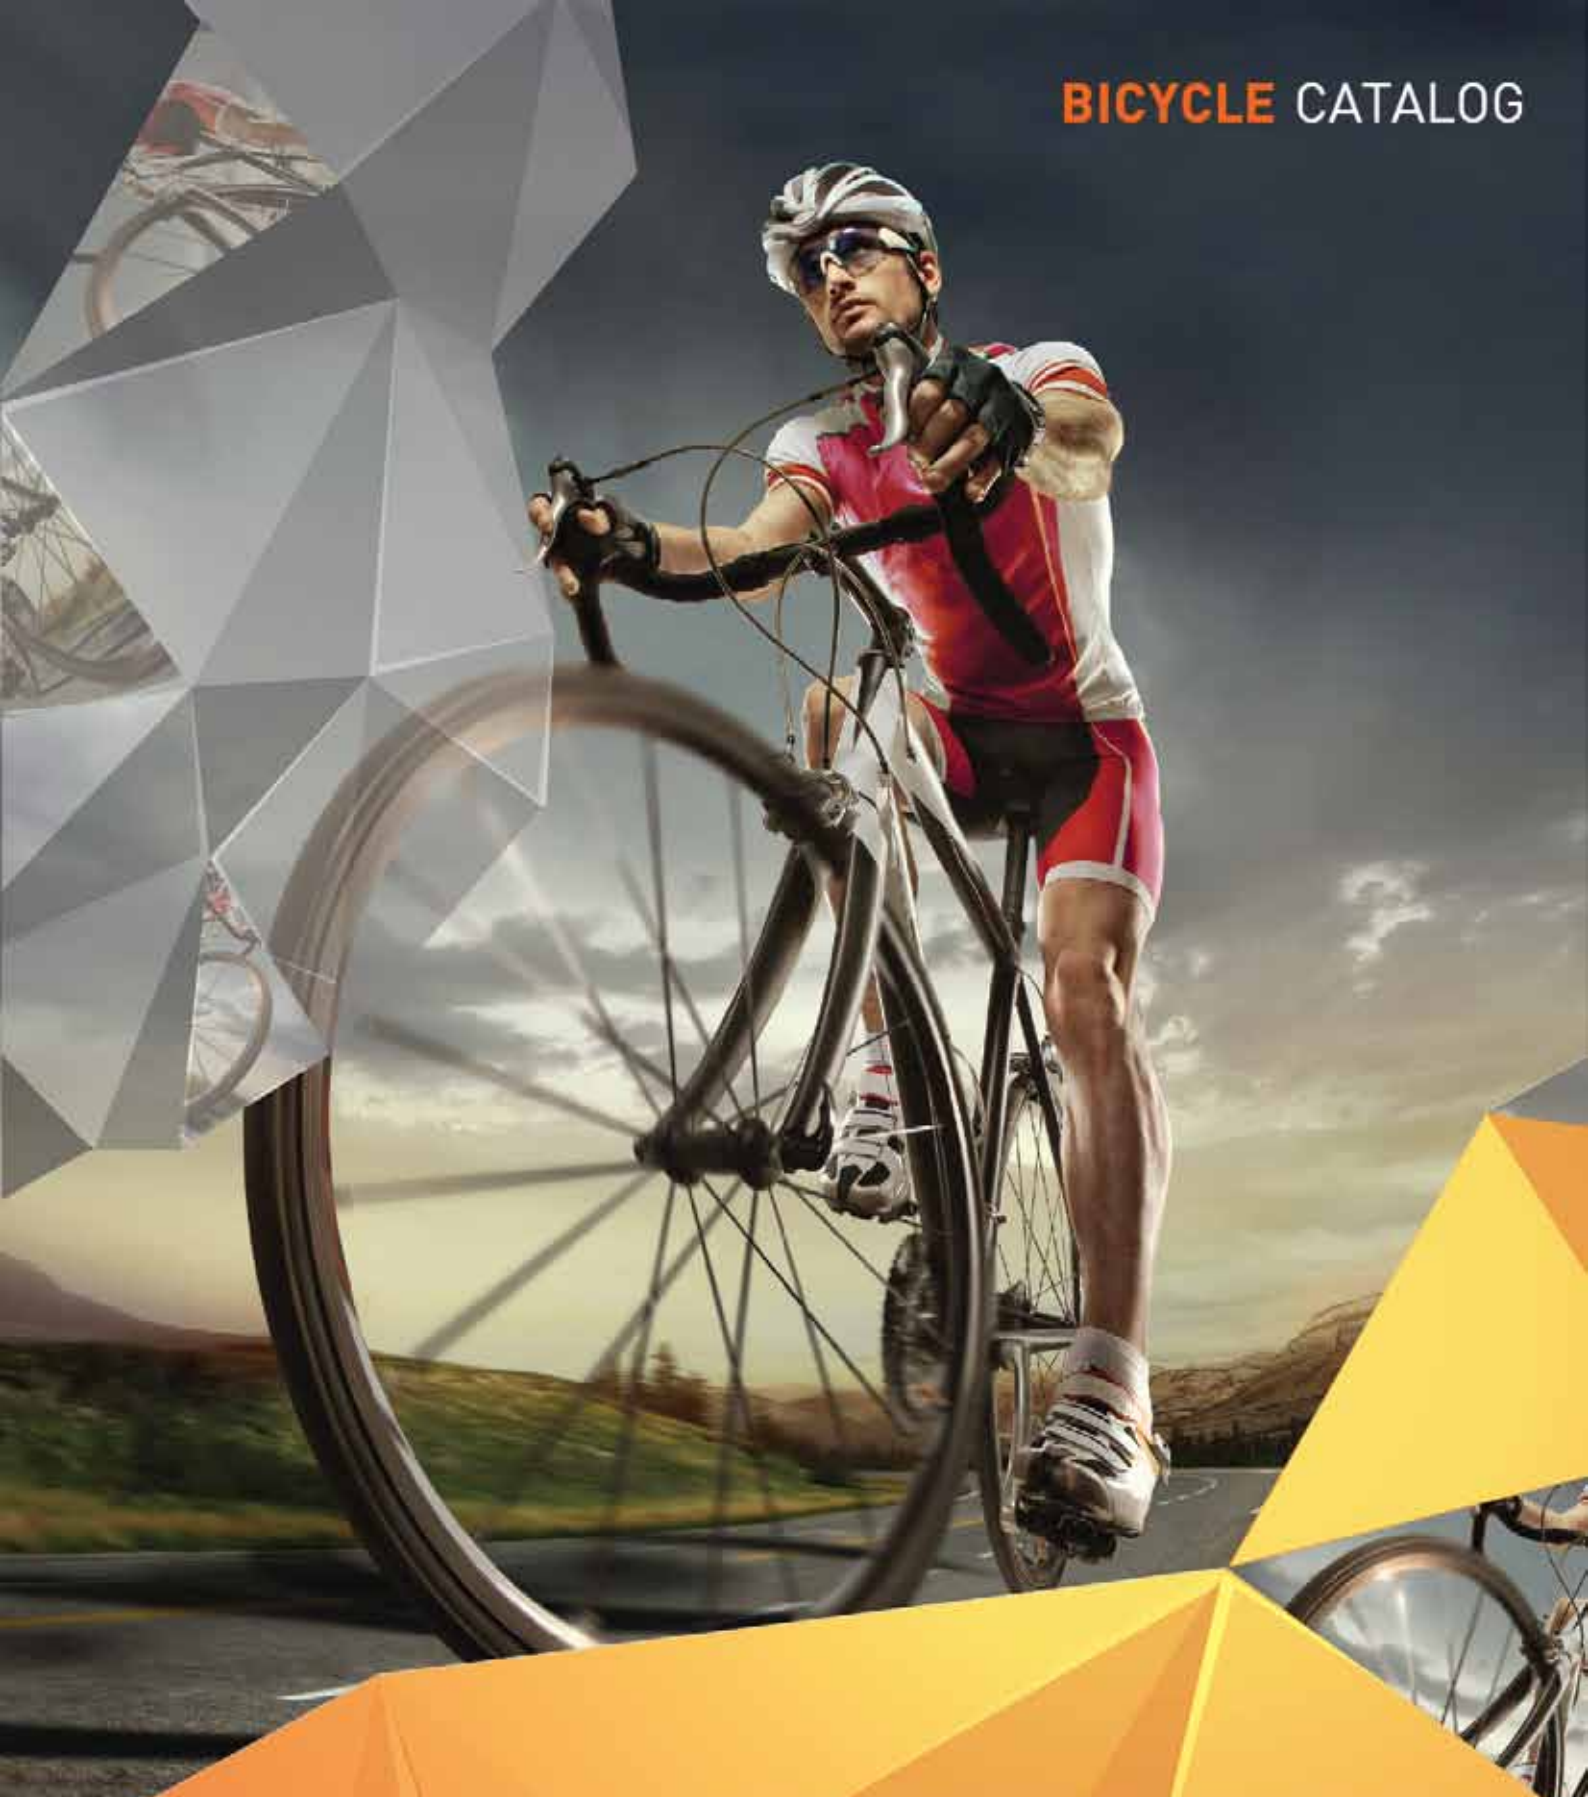

DEESTONE

MOVE THE WORLD

ABOUT **DEESTONE**

DEESTONE was founded in 1977 by Mr. Suvit Vongsariyavanich. The company's vision is to manufacture quality tires for vehicles. Deestone's business philosophy "Integrity, Honesty, and Accountability" have resulted our company with worldwide reputation, qualifies with the global standards and trusted by more than 120 countries. With over 40 years of experience Deestone has been producing quality tires, while continuously developing every product to the highest standard. The use of new technology has allowed Deestone to create innovations that it meets specific application and use, which answers market demand. Deestone also concerns about environmental factors making our company environmental friendly. We ensure that all of our standard certification is up-to-date. All of our goals are to make our customers trust and proud when using our products.

All products of company serves various market demand which consist of high standard of production and certified with global standards. Deestone Group offers the after sales service to customers, with social responsibilities and warranty on the quality of company's products through all channel of communication with completely and clearly information. Product and brand image have been developing for highest customer satisfaction. We develop and produce quality tires for all segments of vehicles to be a part of your journey.





CONTENT

ABOUT US	02
STREET TIRE	04
FREE STYLE TIRE	12
MOUNTAIN BIKE TIRE	14
HYBRID TIRE	20
ROAD & RACING TIRE	23
BMX TIRE	25
INNER TUBE & OTHERS	29



STREET TIRE

**D206****D209****D275****D276****D277****D278****D279**

PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BAR.	PSI	BAR.		
D206	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
	700x35C	37-622	WIRE	707	37	50	3.4	75	5.2	S/S	19C
D209	26x1.00	25-559	WIRE	617	25	50	3.4	65	4.5	S/S	15C
	26x1 3/8x1 1/8	28-590	WIRE	657	28	40	2.7	65	4.5	S/S	15C
	26x1.40	40-559	WIRE	652	40	40	2.7	65	4.5	H/B	19C
D275	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
D276	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
D277	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
D278	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
D279	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C

**D280****D281****D282****D283****D284****D286****D287**

PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BARS.	PSI	BARS.		
D280	28x1 1/2	40-635	WIRE	726	40	50	3.4	65	4.5	S/S	19C
D281	28x1 1/2	40-635	WIRE	726	40	50	3.4	65	4.5	S/S	19C
D282	28x1 1/2	40-635	WIRE	726	40	50	3.4	65	4.5	S/S	19C
D283	28x1 1/2	40-635	WIRE	726	40	50	3.4	65	4.5	S/S	19C
D284	28x1 1/2	40-635	WIRE	726	40	50	3.4	65	4.5	S/S	19C
D286	24x1.75	47-507	WIRE	612	47	40	2.7	50	3.4	H/B	19C
D287	22x2.125	54-457	WIRE	576	54	-	-	44	3.0	H/B	19C

**D288****D289****D307****D309****D789****D801****D802**

PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BAR.	PSI	BAR.		
D288	16x3.00	75-305	WIRE	466	75	-	-	41	2.8	H/B	27C
	20x3.00	75-406	WIRE	567	75	-	-	41	2.8	H/B	27C
D289	24x3.00	75-507	WIRE	668	75	-	-	41	2.8	H/B	27C
D307	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
D309	12 1/2x1.75x2 1/4	47-203	WIRE	308	47	25	2.0	35	2.4	S/S	19C
	14x1 3/8x1 5/8	44-288	WIRE	387	44	40	2.7	55	3.8	S/S	19C
	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
D789	26x2x1 3/4	54-571	WIRE	690	54	40	2.7	65	4.5	S/S	19C
D801	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
	28x1 1/2	40-635	WIRE	726	40	50	3.4	65	4.5	S/S	19C
	28x1 5/8x1 1/8	28-622	WIRE	689	28	-	-	90	6.2	S/S	17C
	28x1 5/8x1 1/4	32-622	WIRE	697	32	-	-	70	4.8	S/S	17C
	28x1 5/8x1 3/8	37-622	WIRE/FOLDS	707	37	-	-	70	4.8	S/S	19C
D802	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.4	S/S	19C
	27x1 3/8	32-630	WIRE	705	32	45	3.1	60	4.1	S/S	17C
	700x38C	40-622	WIRE	713	40	50	3.4	75	5.2	S/S	19C

**D811****D820****D823****D837****D838****D871****D872**

PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BAR.	PSI	BAR.		
D811	24x1.75	47-507	WIRE	612	47	50	3.4	65	4.5	S/S	19C
D820	26x1.90	47-559	WIRE	666	47	40	2.7	65	4.5	H/B	19C
D823	24x1.75	47-507	WIRE	612	47	50	3.4	65	4.5	S/S	19C
	26x1.75	47-559	WIRE	666	47	40	2.7	65	4.5	H/B	19C
	28x1.75	47-622	WIRE	727	47	45	3.1	58	4.0	S/S	19C
	700x42C	44-622	WIRE	721	44	-	-	75	5.2	S/S	19C
D837	28x1.75	47-622	WIRE	727	47	45	3.1	58	4.0	S/S	19C
D838	28x1.75	47-622	WIRE	727	47	45	3.1	58	4.0	S/S	19C
D871	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
D872	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C

**D873****D874****D875****D877****D878****D879****D880**

PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BAR.S.	PSI	BAR.S.		
D873	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
	26x2.00	54-559	WIRE	680	54	30	2.0	65	4.5	H/B	19C
D874	24x1 3/8	37-540	WIRE	625	37	40	2.7	65	4.5	H/B	19C
	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
D875	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
D877	26x1 1/2x1 5/8	44-584	WIRE	683	44	50	3.4	65	4.5	S/S	19C
D878	26x1 1/2x1 5/8	44-584	WIRE	683	44	50	3.4	65	4.5	S/S	19C
D879	26x2x1 3/4	54-571	WIRE	690	54	40	2.7	65	4.5	H/B	19C
D880	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
	27x1 3/8	32-630	WIRE	705	32	60	4.1	75	5.2	S/S	17C

**D881****D882****D883****D884****D903****D1003****D1004**

PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BAR.	PSI	BAR.		
D881	700x28C	28-622	WIRE	689	28	58	4.0	102	7.0	H/B	17C
	700x35C	37-622	WIRE	707	37	51	3.5	87	6.0	H/B	19C
D882	700x28C	28-622	WIRE	689	28	58	4.0	102	7.0	H/B	17C
	700x35C	37-622	WIRE	707	37	51	3.5	87	6.0	H/B	19C
D883	22x1.75	47-457	WIRE	562	47	41	2.8	67	4.6	H/B	19C
	700x28C	28-622	WIRE	689	28	58	4.0	102	7.0	H/B	17C
	700x35C	37-622	WIRE	707	37	51	3.5	87	6.0	H/B	19C
D884	700x35C	37-622	WIRE	707	37	51	3.5	87	6.0	H/B	19C
D903	700x35C	37-622	WIRE	707	37	50	3.4	75	5.2	S/S	19C
	700x38C	40-622	WIRE	713	40	50	3.4	75	5.2	S/S	19C
	700x40C	40-622	WIRE	713	40	50	3.4	75	5.2	S/S	19C
D1003	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
	26x1 1/2	40-584	WIRE	675	40	50	3.4	65	4.5	S/S	19C
	26x1 1/2x1 5/8	44-584	WIRE	683	44	50	3.4	65	4.5	S/S	19C
	26x1 1/2x2	50-584	WIRE	695	50	40	2.7	55	3.8	S/S	19C
D1004	26x1.75	47-559	WIRE	666	47	40	2.7	65	4.5	H/B	19C
	28x1.75	47-622	WIRE	727	47	45	3.1	58	4.0	S/S	19C

**D1005****D1006****DS-K1****DS-K2****DS-K3****DS-K4****DS-K5**

PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BAR.S.	PSI	BAR.S.		
D1005	24x1 3/8	37-540	WIRE	625	37	40	2.7	65	4.5	H/B	19C
	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
D1006	12 1/2x2 1/4	57-203	WIRE	328	57	25	2.0	35	2.4	S/S	19C
	24x1 3/8	37-540	WIRE	625	37	40	2.7	65	4.5	H/B	19C
	26x1.75	47-559	WIRE/FOLDS	666	47	40	2.7	65	4.5	H/B	19C
	26x1.90	50-559	WIRE	672	50	40	2.7	65	4.5	H/B	19C
	28x1.75	47-622	WIRE/FOLDS	727	47	45	3.1	58	4.0	S/S	19C
	700x28C	28-622	WIRE	689	28	80	5.4	90	6.2	S/S	17C
	700x32C	32-622	WIRE	697	32	50	3.4	75	5.2	S/S	17C
	700x35C	37-622	WIRE	707	37	50	3.4	75	5.2	S/S	19C
	700x38C	40-622	WIRE	713	40	50	3.4	75	5.2	S/S	19C
	700x40C-42C	42-622	WIRE	717	42	50	3.4	75	5.2	S/S	19C
DS-K1	26x1 1/2	-	BE	664	40	-	-	44	3.0	R/B	-
DS-K2	26x1 3/4	-	BE	685	46	-	-	44	3.0	R/B	-
DS-K3	26x1 3/4	-	BE	685	46	-	-	44	3.0	R/B	-
DS-K4	26x2 1/2	-	BE	700	70	-	-	44	3.0	R/B	-
DS-K5	26x1 1/2	-	BE	664	40	-	-	44	3.0	R/B	-
	26x2 1/2	-	BE	700	70	-	-	44	3.0	R/B	-
	26x3	-	BE	687	80	-	-	44	3.0	R/B	-

FREE STYLE TIRE

**D503****D601****D602****D604****D606****D805**

PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BAR.	PSI	BAR.		
D503	20x2.125	57-406	WIRE	531	57	35	2.4	45	3.1	H/B	19C
D601	20x2.125	57-406	WIRE	531	57	35	2.4	45	3.1	H/B	19C
	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
D602	20x2.125	57-406	WIRE	531	57	35	2.4	45	3.1	H/B	19C
D604	20x2.125	57-406	WIRE	531	57	35	2.4	45	3.1	H/B	19C
D606	20x2.125	57-406	WIRE	531	57	35	2.4	45	3.1	H/B	19C
D805	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
	20x1.95	50-406	WIRE	517	50	35	2.4	45	3.1	H/B	19C

MOUNTAIN BIKE TIRE



PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BARS.	PSI	BARS.		
D200	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	26x1.90	50-559	WIRE	672	50	40	2.7	65	4.5	H/B	19C
D201	12 1/2x1.75x2 1/4	47-203	WIRE	308	47	25	2.0	35	2.4	S/S	19C
	14x1.75	44-254	WIRE	387	44	40	2.7	50	3.4	H/B	19C
	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	16x2.00	54-305	WIRE	424	54	35	2.4	45	3.1	H/B	19C
	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
	20x1.90	50-406	WIRE	517	50	35	2.4	45	3.1	H/B	19C
	20x1.95	54-406	WIRE	525	54	35	2.4	45	3.1	H/B	19C
	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	24x1.90	50-507	WIRE	618	50	40	2.7	65	4.5	H/B	19C
	24x1.95	54-507	WIRE	626	54	40	2.7	65	4.5	H/B	19C
	24x2.10	56-507	WIRE	631	56	40	2.7	65	4.5	H/B	19C
	26x1.90	50-559	WIRE	672	50	40	2.7	65	4.5	H/B	19C
	26x2.10	56-559	WIRE	684	56	40	2.7	65	4.5	H/B	19C
D202	12 1/2x1.75x2 1/4	47-203	WIRE	308	47	25	2.0	35	2.4	S/S	19C
	14x1 3/8x1 5/8	44-288	WIRE	387	44	40	2.7	55	3.8	S/S	19C
	14x1.75	44-254	WIRE	387	44	40	2.7	50	3.4	H/B	19C
	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	16x1.90	50-305	WIRE	416	50	35	2.4	45	3.1	H/B	19C
	20x1.75	44-406	WIRE	505	47	30	2.0	40	2.7	H/B	19C
	20x1.90	47-406	WIRE	511	47	35	2.4	45	3.1	H/B	19C
	24x1.75	44-507	WIRE	606	44	40	2.7	65	4.5	H/B	19C
	24x1.90	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	24x1.95	54-507	WIRE	626	54	40	2.7	65	4.5	H/B	19C
	24x2.10	56-507	WIRE	631	56	40	2.7	65	4.5	H/B	19C
	26x1.75	44-559	WIRE	660	44	40	2.7	65	4.5	H/B	19C
	26x1.90	47-559	WIRE/FOLDS	666	47	40	2.7	65	4.5	H/B	19C
	26x2.05	54-559	WIRE	680	54	40	2.7	65	4.5	H/B	19C
	26x2.10	54-559	WIRE	680	54	40	2.7	65	4.5	H/B	19C
26x2.125	54-559	WIRE	680	54	35	2.4	45	3.1	H/B	19C	



D203

D204

D207

PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BARS.	PSI	BARS.		
D203	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	16x1.90	50-305	WIRE	416	50	35	2.4	45	3.1	H/B	19C
	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
	20x1.90	50-406	WIRE	517	50	35	2.4	45	3.1	H/B	19C
	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	24x1.90	50-507	WIRE	618	50	40	2.7	65	4.5	H/B	19C
	26x2.05	54-559	WIRE	680	54	40	2.7	65	4.5	H/B	19C
	26x2.10	54-559	WIRE	680	54	40	2.7	65	4.5	H/B	19C
D204	12 1/2x1.75x2 1/4	47-203	WIRE	308	47	25	2.0	35	2.4	S/S	19C
	14x1.75	44-254	WIRE	387	44	40	2.7	50	3.4	H/B	19C
	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	16x1.95	54-305	WIRE	424	54	35	2.4	45	3.1	H/B	19C
	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
	20x1.90	50-406	WIRE	517	50	35	2.4	45	3.1	H/B	19C
	20x2.125	57-406	WIRE	531	57	35	2.4	45	3.1	H/B	19C
	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	24x1.90	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	24x1.95	54-507	WIRE	626	54	40	2.7	65	4.5	H/B	19C
	24x2.00	54-507	WIRE	626	54	40	2.7	65	4.5	H/B	19C
	24x2.10	56-507	WIRE	631	56	40	2.7	65	4.5	H/B	19C
	26x1.75	44-559	WIRE	660	44	40	2.7	65	4.5	H/B	19C
	26x1.90	47-559	WIRE	666	47	40	2.7	65	4.5	H/B	19C
	26x2.05	54-559	WIRE	680	54	40	2.7	65	4.5	H/B	19C
26x2.125	54-559	WIRE/FOLDS	680	54	35	2.4	45	3.1	H/B	19C	
D207	20x1.90	50-406	WIRE	517	50	35	2.4	45	3.1	H/B	19C
	24x1.90	50-507	WIRE	618	50	40	2.7	65	4.5	H/B	19C
	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
	26x1.90	50-559	WIRE/FOLDS	672	50	40	2.7	65	4.5	H/B	19C
	26x2.05	54-559	WIRE	680	54	40	2.7	65	4.5	H/B	19C
	26x2.10	56-559	WIRE	684	56	40	2.7	65	4.5	H/B	19C



PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BARS.	PSI	BARS.		
D208	20x2.10	56-406	WIRE	529	56	35	2.4	45	3.1	H/B	19C
	20x2.125	57-406	WIRE	531	57	35	2.4	45	3.1	H/B	19C
	24x2.10	56-507	WIRE	631	56	40	2.7	65	4.5	H/B	19C
	26x1.95	50-559	WIRE/FOLDS	672	50	40	2.7	65	4.5	H/B	19C
	26x2.10	56-559	WIRE	684	56	40	2.7	65	4.5	H/B	19C
D210	26x1.90	50-559	WIRE/FOLDS	672	50	29	2.0	65	4.5	H/B	19C
	26x2.10	54-559	WIRE/FOLDS	680	54	29	2.0	65	4.5	H/B	19C
	26x2.125	54-559	WIRE/FOLDS	680	54	29	2.0	58	4.0	H/B	19C
	26x2.35	60-559	WIRE/FOLDS	692	60	23	1.6	51	3.5	H/B	21C
D211	26x1.90	47-559	WIRE/FOLDS	666	47	29	2.0	65	4.5	H/B	19C
D212	26x2.10	54-559	WIRE/FOLDS	680	54	29	2.0	58	4.0	H/B	19C
	26x2.25	57-559	WIRE/FOLDS	686	57	26	1.8	54	3.7	H/B	19C
	27.5x2.10	54-584	WIRE/FOLDS	703	54	29	2.0	58	4.0	H/B	19C
	27.5x2.25	57-584	WIRE/FOLDS	709	57	26	1.8	54	3.7	H/B	19C
D213	20x1.75	44-406	WIRE	505	44	36	2.5	73	5.0	H/B	19C
	20x1.90	47-406	WIRE	511	47	29	2.0	65	4.5	H/B	19C
	20x1.95	50-406	WIRE	517	50	29	2.0	65	4.5	H/B	19C
	24x1.75	44-507	WIRE	606	44	29	2.0	65	4.5	H/B	19C
	24x1.90	47-507	WIRE	612	47	29	2.0	65	4.5	H/B	19C
	24x1.95	50-507	WIRE	618	50	29	2.0	65	4.5	H/B	19C
	26x1.75	44-559	WIRE/FOLDS	660	44	36	2.5	73	5.0	H/B	19C
	26x1.90	47-559	WIRE/FOLDS	666	47	29	2.0	65	4.5	H/B	19C
	26x1.95	50-559	WIRE/FOLDS	672	50	29	2.0	65	4.5	H/B	19C
	26x2.10	54-559	WIRE/FOLDS	680	54	29	2.0	58	4.0	H/B	19C
	26x2.25	57-559	WIRE/FOLDS	686	57	26	1.8	54	3.7	H/B	19C
	26x2.35	60-559	WIRE/FOLDS	692	60	23	1.6	51	3.5	H/B	21C
	27.5x2.10	54-584	WIRE/FOLDS	703	54	29	2.0	58	4.0	H/B	19C
	27.5x2.25	57-584	WIRE/FOLDS	709	57	26	1.8	54	3.7	H/B	19C
	29x1.95	50-622	WIRE/FOLDS	733	50	29	2.0	65	4.5	H/B	19C
29x2.10	54-622	WIRE/FOLDS	741	54	29	2.0	58	4.0	H/B	19C	
29x2.25	57-622	WIRE/FOLDS	747	57	26	1.8	54	3.7	H/B	19C	

**D220****D793****D806****D808****D809****D814****D824**

PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BARS.	PSI	BARS.		
D220	26x4.00	100-559	WIRE	734	100	-	-	20	1.4	H/B	19C
	26x4.90	120-559	WIRE	759	120	-	-	20	1.4	H/B	19C
D793	26x2.10	54-559	WIRE	680	54	40	2.7	65	4.5	H/B	19C
	26x2.125	54-559	WIRE	680	54	35	2.4	45	3.1	H/B	19C
D806	26x1.90	47-559	WIRE/FOLDS	666	47	40	2.7	65	4.5	H/B	19C
	26x1.95	50-559	WIRE	672	50	40	2.7	65	4.5	H/B	19C
D808	16x2.125	57-305	WIRE	430	57	35	2.4	45	3.1	H/B	19C
	26x1.95	54-559	WIRE/FOLDS	680	54	40	2.7	65	4.5	H/B	19C
	26x2.10	56-559	WIRE	684	56	40	2.7	65	4.5	H/B	19C
D809	20x2.125	57-406	WIRE	531	57	35	2.4	45	3.1	H/B	19C
	26x2.10	56-559	WIRE	684	56	40	2.7	65	4.5	H/B	19C
D814	24x2.125	56-507	WIRE	631	56	40	2.7	65	4.5	H/B	19C
	26x2.125	57-559	WIRE	686	57	35	2.4	45	3.1	H/B	19C
D824	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	26x1.75	47-559	WIRE/FOLDS	666	47	40	2.7	65	4.5	H/B	19C



PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BAR.	PSI	BAR.		
D825	24x1.95	54-507	WIRE	626	54	40	2.7	65	4.5	H/B	19C
D827	26x2.10	56-559	WIRE/FOLDS	684	56	40	2.7	65	4.5	H/B	19C
D829	24x1.75	47-507	WIRE	612	47	47	2.7	65	4.5	H/B	19C
D831	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	24x2.25	56-507	WIRE	631	56	40	2.7	65	4.5	H/B	19C
	26x2.35	57-559	WIRE/FOLDS	686	57	40	2.7	65	4.5	H/B	21C
D834	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	26x2.35	60-559	WIRE/FOLDS	692	60	23	1.6	51	3.5	H/B	21C

HYBRID TIRE



PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BARS.	PSI	BARS.		
D803	24x1.75	44-507	WIRE	606	44	40	2.7	65	4.5	H/B	19C
	26x1.75	44-559	WIRE/FOLDS	660	44	40	2.7	65	4.5	H/B	19C
	26x1.90	47-559	WIRE	666	47	40	2.7	65	4.5	H/B	19C
	26x1.95	50-559	WIRE	672	50	40	2.7	65	4.5	H/B	19C
D804	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	26x1.75	44-559	WIRE	660	44	40	2.7	65	4.5	H/B	19C
	26x1.95	54-559	WIRE	680	54	40	2.7	65	4.5	H/B	19C
	700x38C	40-622	WIRE	713	40	50	3.4	75	5.2	S/S	19C
D807	12 1/2x1.75x2 1/4	47-203	WIRE	308	47	25	2.0	35	2.4	S/S	19C
	14x1 3/8x1 5/8	44-288	WIRE	387	44	40	2.7	55	3.8	S/S	19C
	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	20x1.90	50-406	WIRE	517	50	35	2.4	45	3.1	H/B	19C
	24x1.90	50-507	WIRE	618	50	40	2.7	65	4.5	H/B	19C
	26x1.75	44-559	WIRE	660	44	40	2.7	65	4.5	H/B	19C
	26x1.95	50-559	WIRE	672	50	40	2.7	65	4.5	H/B	19C
	28x1.75	47-622	WIRE/FOLDS	727	47	45	3.1	58	4.0	S/S	19C
	700x35C	37-622	WIRE	707	37	50	3.4	75	5.2	S/S	19C
	700x38C	40-622	WIRE	713	40	50	3.4	75	5.2	S/S	19C
	700x40C	40-622	WIRE	713	40	50	3.4	75	5.2	S/S	19C
700x42C	44-622	WIRE	721	44	-	-	75	5.2	S/S	19C	
D817	12 1/2x1.75x2 1/4	47-203	WIRE	308	47	25	2.0	35	2.4	S/S	19C
	14x1.75	44-254	WIRE	387	44	40	2.7	50	3.4	H/B	19C
	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
	20x2.00	54-406	WIRE	525	54	30	2.0	65	4.5	H/B	19C
	24x1.75	47-507	WIRE	612	47	40	2.7	50	3.4	H/B	19C
	24x2.00	54-507	WIRE	626	54	30	2.0	65	4.5	H/B	19C
	26x1.90	50-559	WIRE	672	50	40	2.7	50	3.4	H/B	19C
	26x2.00	54-559	WIRE	680	54	30	2.0	65	4.5	H/B	19C
	28x1.75	47-622	WIRE	727	47	40	2.7	58	4.0	H/B	19C
D818	12 1/2x1.75x2 1/4	47-203	WIRE	308	47	25	2.0	35	2.4	S/S	19C
	14x1.75	44-254	WIRE	387	44	40	2.7	50	3.4	H/B	19C
	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
	24x1.75	44-507	WIRE	606	44	40	2.7	65	4.5	H/B	19C
	26x1.90	50-559	WIRE	672	50	40	2.7	65	4.5	H/B	19C
D821	24x1.95	54-507	WIRE	626	54	40	2.7	65	4.5	H/B	19C

**D826****D828****D830****D832****D833****D835****D836**

PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BARS.	PSI	BARS.		
D826	12 1/2x1.75x2 1/4	47-203	WIRE	308	47	25	2.0	35	2.4	S/S	19C
	14x1 3/8x1 5/8	44-288	WIRE	387	44	40	2.7	55	3.8	S/S	19C
	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	20x1.90	50-406	WIRE	517	50	35	2.4	45	3.1	H/B	19C
	24x1.90	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	26x1.75	44-559	WIRE	660	44	40	2.7	65	4.5	H/B	19C
	26x1.90	47-559	WIRE	666	47	40	2.7	65	4.5	H/B	19C
D828	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	26x1.90	50-559	WIRE/FOLDS	672	50	40	2.7	65	4.5	H/B	19C
D830	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
D832	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	26x1 3/8	37-590	WIRE	675	37	50	3.4	65	4.5	S/S	19C
	26x1.40	37-559	WIRE	646	37	40	2.7	65	4.5	H/B	19C
	26x1.75	44-559	WIRE	660	44	40	2.7	65	4.5	H/B	19C
	700x35C	37-622	WIRE	707	37	50	3.4	75	5.2	S/S	19C
D833	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	20x1.75	44-406	WIRE	505	47	30	2.0	40	2.7	H/B	19C
	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
	28x1.75	47-622	WIRE	727	47	45	3.1	58	4.0	S/S	19C
D835	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
	24x1.75	47-507	WIRE	612	47	40	2.7	65	4.5	H/B	19C
D836	26x2.125	54-559	WIRE	680	54	35	2.4	45	3.1	H/B	19C

ROAD & RACING TIRE



PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BARS.	PSI	BARS.		
D1001	700x20C	20-622	WIRE	670	20	-	-	100	6.9	S/S	13C
	700x23C	23-622	WIRE/FOLDS	676	23	-	-	100	6.9	S/S	15C
	700x28C	28-622	WIRE	689	28	80	5.4	90	6.2	S/S	17C
D1002	700x28C	28-622	WIRE	689	28	80	5.4	90	6.2	S/S	17C
D271	27x1 1/4	32-630	WIRE	705	32	60	4.1	75	5.2	S/S	17C
D272	27x1 1/4	32-630	WIRE	705	32	60	4.1	75	5.2	S/S	17C
D273	26x1 3/8	37-590	WIRE	675	37	50	3.4	60	4.1	S/S	19C
	27x1 1/4	32-630	WIRE	705	32	60	4.1	75	5.2	S/S	17C
D274	26x1 3/8	37-590	WIRE	675	37	50	3.4	60	4.1	S/S	19C

BMX TIRE

**D205****D285****D401****D402****D403****D404****D405**

PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BAR.S.	PSI	BAR.S.		
D205	12 1/2x1.75x2 1/4	47-203	WIRE	308	47	25	2.0	35	2.4	S/S	19C
	14x1.75	44-254	WIRE	387	44	40	2.7	55	3.8	S/S	19C
	14x1 3/8x1 5/8	44-288	WIRE	387	44	40	2.7	50	3.4	H/B	19C
	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	16x1.90	50-305	WIRE	416	50	35	2.4	45	3.1	H/B	19C
	16x2.00	54-305	WIRE	424	54	35	2.4	45	3.1	H/B	19C
	20x2.00	54-406	WIRE	525	54	35	2.4	45	3.1	H/B	19C
	20x2.125	57-406	WIRE	531	57	35	2.4	45	3.1	H/B	19C
D285	20x2.125	54-406	WIRE	525	54	-	-	32	2.2	H/B	19C
D401	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
D402	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
D403	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
D404	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
D405	14x1.75	44-254	WIRE	387	44	40	2.7	50	3.4	H/B	19C
	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C

**D501****D502****D505****D605****D810****D813****D815**

PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BAR.	PSI	BAR.		
D501	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
	20x2.125	57-406	WIRE	531	57	35	2.4	45	3.1	H/B	19C
D502	12 1/2x2 1/4	62-203	WIRE	340	62	25	2.0	35	2.4	H/B	21C
	14x2.125	57-254	WIRE	413	57	40	2.7	55	3.8	H/B	19C
	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	20x1.75	44-406	WIRE	505	44	30	2.0	40	2.7	H/B	19C
	20x2.125	54-406	WIRE	525	54	35	2.4	45	3.1	H/B	19C
D505	20x2.125	57-406	WIRE	531	57	35	2.4	45	3.1	H/B	19C
D605	16x2.125	57-305	WIRE	430	57	35	2.4	45	3.1	H/B	19C
	20x2.125	54-406	WIRE	525	54	35	2.4	45	3.1	H/B	19C
D810	20x2.125	54-406	WIRE	525	54	35	2.4	45	3.1	H/B	19C
D813	16x2.125	57-305	WIRE	430	57	35	2.4	45	3.1	H/B	19C
	20x2.125	57-406	WIRE	531	57	35	2.4	45	3.1	H/B	19C
D815	18x2.125	57-355	WIRE	480	57	35	2.4	45	3.1	H/B	19C



PATTERN NAME	SIZE	ETRTO No.	BEAD	DIMENSION (mm)		INF. MIN		INF. MAX		RIM TYPE	MEASURING RIM WIDTH CODE
				OD.	SW.	PSI	BARS.	PSI	BARS.		
D816	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
	20x1.85	47-406	WIRE	511	47	-	-	100	6.9	H/B	19C
	20x2.00	54-406	WIRE	525	54	35	2.4	45	3.1	H/B	19C
D819	12 1/2x1.75x2 1/4	47-203	WIRE	308	47	25	2.0	35	2.4	S/S	19C
	16x1.75	44-305	WIRE	404	44	40	2.7	50	3.4	H/B	19C
	20x1.75	47-406	WIRE	511	47	30	2.0	40	2.7	H/B	19C
D822	20x2.125	54-406	WIRE	525	54	35	2.4	45	3.1	H/B	19C

INNER TUBE & OTHERS

INNER TUBE

BUTYL RUBBER TUBE

SIZE	ETRT0 No.
12 1/2x1.75x2 1/4	47/62-203
14x1 3/8	44-288
14x1.50/1.75	40/47-254
16x1.50/1.75	40/47-305
16x1.90/2.125	50/57-305
18x1.90/2.125	50/57-355
20x1.25/1.50	32/40-406
20x1.50/1.75	40/47-406
20x1.75/1.90	47/50-406
20x1.90/2.125	50/57-406
20x3.00	75-406
22x1 3/8	37-457
22x1.75	47-457
22x2.125	54-457
24x1 1/4	32-520
24x1 3/8	37-540
24x1.50/1.75	40/47-507
24x1.75/1.90	47/50-507
24x1.90/2.125	50/57-507
24x3.00	75-507
26x1.00	25-559
26x1 1/2	40-584
26x1 1/4	32-597
26x1 3/8	37-590
26x1 3/4	47-571
26x1.40	38-559
26x1.75/1.90/2.125	47/57-559
26x2 1/2	67-584
26x4.00/4.90	100/125-559
26x4.25/4.70	108/120-559
27x1 1/4/1 3/8	32/37-630
27.5x1.90/2.25	50/57-584
28x1 1/2	40-635
28x1.75/1.90	47/50-622
29x1.90/2.25	50/57-622
700x19-23C	19/23-622
700x25-32C	25/32-622
700x35-43C	35/43-622
700x38-42C	38/42-622

NATURAL RUBBER TUBE

SIZE	ETRT0 No.
12 1/2x1.75x2 1/4	47/62-203
14x1 3/8	44-288
14x1.50/1.75	40/47-254
16x1.50/1.75	40/47-305
16x1.90/2.125	50/57-305
18x1.90/2.125	50/57-355
20x1.50/1.75	40/47-406
20x1.90/2.125	50/57-406
20x3.00	75-406
22x1 3/8	37-457
22x1.75	47-457
22x2.125	54-457
24x1 3/8	37-540
24x1.50/1.75	40/47-507
24x1.90/2.125	50/57-507
24x3.00	75-507
26x1 1/2	40-584
26x1 3/8	37-590
26x1 3/4	47-571
26x1.75/1.90/2.125	47/57-559
26x2.125	57-559
26x2 1/2	67-584
27x1 1/4/1 3/8	32/37-630
27.5x1.90/2.25	50/57-584
28x1 1/2	40-635
28x1.75/1.90	47/50-622
700x35-43C	35/43-622

OTHERS

PACKAGING



COLOR LINE



FOLDABLE



COLOR TIRE



VALVES

AMERICAN TYPE (A/V)



EASY PUMP TYPE (E/P)



GERMAN TYPE (D/V)



ITALIAN TYPE (I/V)



FRENCH TYPE (F/V)





DEESTONE CORPORATION LIMITED

84 Soi Phet Kasem 122 , Moo 7, Phet Kasem Road , Om Noi , Krathum Baen,

Samut Sakhon 74130 THAILAND

Tel : (+662) 420-0038 , 023-4756

Fax : (+662) 420-0572 , 023-4724

E-mail : deestone@deestone.com



www.facebook.com/Deestonetyre



www.deestone.com



Deestonetyre

